

**UNCLASSIFIED**

**24 APR 2005**

577,718

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
18 December 2003 (18.12.2003)

PCT

(10) International Publication Number  
**WO 03/104554 A1**

- (51) International Patent Classification<sup>7</sup>: **D21G 1/00**
- (21) International Application Number: PCT/FI03/00452
- (22) International Filing Date: 9 June 2003 (09.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
U20020278 10 June 2002 (10.06.2002) FI
- (71) Applicant (for all designated States except US): **METSO PAPER, INC.** [FI/FI]; Fabianinkatu 9 A, FIN-00130 Helsinki (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **HAAG, Jorma** [FI/FI]; Pikitie 12, FIN-03620 Karkkila (FI). **LAAKSO-NEN, Keijo** [FI/FI]; Sallisenkatu 6, FIN-05830 Hyvinkää (FI).
- (74) Agent: **TAMPEREEN PATENTTITOIMISTO OY;** Hermiankatu 12 B, FIN-33720 Tampere (FI).
- (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: RELIEF CYLINDER STRUCTURE OF A MULTINIP CALENDER

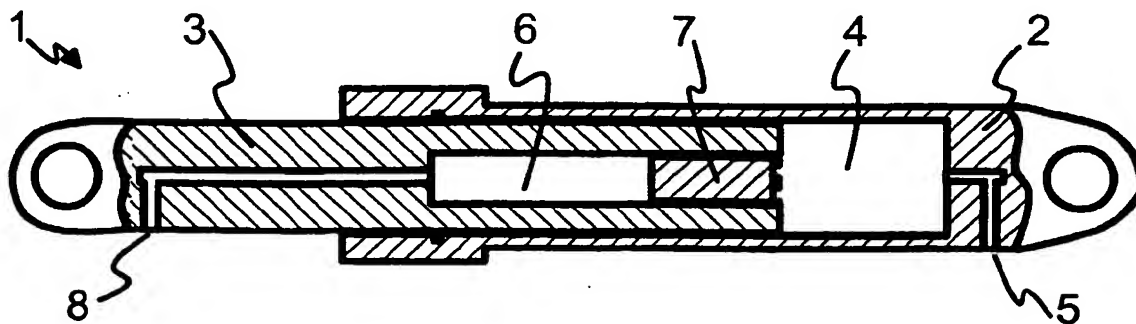

(57) Abstract: The invention relates to a relief cylinder structure (1) for guiding a roll in a multinip calender, said relief cylinder structure comprising at least a frame (2), an arm (3) that is arranged to move linearly in relation to the frame, a quick-opening cylinder (6) and a hydraulic coupling (5,8). The quick-opening cylinder (6) is placed inside the arm (3).

Best Available Copy

WO 03/104554 A1

## Relief cylinder structure of a multinip calender

The invention relates to a relief cylinder structure according to the preamble of the appended claim 1 for guiding the roll of a multinip calender. The invention also relates to an arm used in a relief cylinder structure in accordance with the preamble of the appended claim 6.

A paper web is calendered by passing it through at least one calender nip. It is a known process to use a so-called soft calender in which the web is passed through a nip formed by a hard-faced metal roll and a soft-faced roll. The soft-faced roll is typically formed by coating the roll frame with a suitable polymer material.

The calender may also contain several nips successively in the travel direction of the web. The soft-calender may be composed of two successive pairs of a hard roll and a soft roll. Multinip calenders comprise several rolls successively, for example on top of each other, and in them the number of rolls is larger than in soft-calenders, typically 6 to 12. In multinip calenders the web travels through nips formed between successive rolls. Some of the rolls are soft-faced polymer rolls.

The polymer coating of the calender rolls is an easily damaging component of the machine. If the use of the roll in production continues in spite of the incipient damage, the damage grows, causes defects in the production quality (marking of paper), production breaks (unplanned stoppage resulting from the changing of the damaged roll), and in the worst case risks in occupational safety (sudden loosening of the damaged coating, pieces of coating flying rapidly in the environment).

To be able to prevent damages in the calender in fault situations, the rolls of multiroll calenders must be guided rapidly and accurately away from each other in a fault situation. The loading of rolls during use is typically adjusted by means of hydraulic relief cylinders, whereby it is advantageous to combine quick opening of rolls with the function of the relief cylinders.

Patent publication EP 0 842 324 discloses a relief cylinder structure in which the liquid volume of the cylinder can be altered rapidly and accurately. The basic idea is that the relief cylinder structure comprises an actual relief cylinder and a quick-opening cylinder that affect each other by means of an intermediate structure. In a normal use situation both spaces are in a pressurized state and they both have a predetermined volume. In a fault situation the working pressure is conveyed away from the quick-opening cylinder, wherein the pressure of the relief cylinder transfers the intermediate structure and reduces the volume of the quick-opening cylinder. As a result of the depressurization of the quick-opening cylinder the total length of the entire cylinder structure is shortened. The shortening takes place rapidly, and its length can be determined accurately by means of the dimensioning of the quick-opening cylinder. In a solution of prior art, the quick-opening cylinder and the control devices necessary for the same are placed outside the cylinder structure, typically on the side of the cylinder structure, said solution requiring a considerable amount of space around itself.

The main purpose of the present invention is to disclose a relief cylinder structure that enables the making of a smaller-sized relief cylinder structure.

To attain this purpose, the relief cylinder structure according to the invention is primarily characterized in what will be presented in the characterizing part of the appended claim 1.

The invention further relates to an arm used in a relief cylinder structure, said arm being primarily characterized in what will be presented in the characterizing part of the independent claim 6.

The other dependent claims present some preferred embodiments of the invention.

The basic idea of the invention is to implement a relief cylinder structure in such a manner that its quick-opening cylinder is placed inside the arm of the relief cylinder. By means of the structure according to the invention it is in a fault situation possible to rapidly change the

shape and size of the arm in relation to the main cylinder of the relief cylinder, thus producing a fast movement of the cylinder.

5 In the normal operating position, a moving piston located in the quick-opening cylinder is in such a position that the volume of the quick-opening cylinder is at its largest, and the end of the arm extending towards the main cylinder of the relief cylinder is substantially straight. The length of the relief cylinder structure is advantageously adjusted by adjusting the pressure of the main cylinder of the relief cylinder.

10 In a fault situation, the relief cylinder structure can be shortened rapidly when the quick-opening cylinder is emptied, i.e. in practice its control valve is opened. Thus, the pressure of the main cylinder pushes the piston in the quick-opening cylinder towards the end of the arm, wherein the volume of the main cylinder tends to grow. The external pressing force, however, remains substantially the same and effects the compression of the structure.

20 The compression of the structure substantially corresponds to the change in the volume of the quick-opening cylinder, i.e. by means of a small volume a small movement is attained and by means of a large volume a broad movement is attained. Because the quick-opening movement is proportional to the volume of the quick-opening cylinder, it is possible to accurately determine the breadth of the quick-opening movement, and thus to attain a fast and accurate opening movement in case of a fault situation.

30 By placing the quick-opening cylinder inside the arm of the relief cylinder in accordance with the invention, it is possible to attain such a relief cylinder structure that external devices relating to the quick-opening process are not required in the middle of the same. By means of the relief cylinder structure according to the invention it is possible to use such solutions in a multinip calender that have not been possible in relief cylinder structures of prior art.

35 Furthermore, the structure of a relief cylinder enabling the quick-opening according to the invention requires a smaller number of parts,

and at the same time it can be implemented more easily than solutions of prior art.

In the following, the invention will be described in more detail with reference to the appended principle drawings, in which

Fig. 1 shows a relief cylinder according to the invention when the cylinder is in the working position,

Fig. 2 shows the cylinder according to Fig. 1 in the quick-opening position, and

Fig. 3 shows an embodiment of the invention in the quick-opening position.

Fig. 1 shows an embodiment of the relief cylinder structure 1 according to the invention that comprises a cylinder frame 2 and a piston-like arm 3 arranged to move therein. Inside the frame 2, in the area defined by the arm, an area is formed, for which the term main cylinder 4 will be used hereinbelow. To the main cylinder 4 is connected a hydraulic coupling 5 placed in the frame 2, the term main coupling 5 being used hereinbelow for said coupling. The other end of the main coupling 5 is advantageously placed close to the end of the frame 2, from which it can be easily connected to the hydraulic system. The gap between the frame 2 and the arm 3 is advantageously sealed in a known manner.

According to the invention, a quick-opening cylinder 6 is arranged inside the arm 3, and an auxiliary piston 7 is arranged to move therein. To the main cylinder 6 is connected a hydraulic coupling 8, the term auxiliary coupling 8 being used for said coupling hereinbelow. The auxiliary coupling 8 is advantageously placed in such a manner that its other end is positioned close to the end of the arm 3. Thus, the auxiliary coupling 8 can be connected to the hydraulic system in such a manner that the joints are well protected against external damaging factors.

## 5

In the following, the function of a relief cylinder structure 1 according to the example will be described in a normal operating position according to Fig. 1 and in the quick-opening situation of Fig. 2.

5 In the operating position the relief cylinder structure 1 is typically at its longest, wherein the nips between the superimposed rolls of the calendar become as low as possible. In the relief cylinder structure according to the invention, pressure is supplied from the hydraulic system both to the main coupling 5 and to the auxiliary coupling 8. Thus, the  
10 volume of the main cylinder 4 is increased when the arm 3 moves in relation to the frame 2 under the influence of the pressure produced via the main coupling 5, restricted by the counterforce produced by the roll.

Through the auxiliary coupling 8, pressure is conveyed to the quick-  
15 opening cylinder 6, and as a result of this a pressure effect is also exerted on the auxiliary piston 7. In the normal operating position at least the same, advantageously a slightly higher pressure is exerted on the quick-opening cylinder 6 than in the main cylinder 4. Thus, the auxiliary piston 7 is positioned in the manner shown in Fig. 1, wherein the  
20 volume of the quick-opening cylinder 6 is at its largest. After the pressure produced in the quick-opening cylinder 6, it is advantageous to close the hydraulic system leading to the auxiliary coupling 8 in such a manner that said pressure remains in the quick-opening cylinder. After the closing of the above-described pressure system it is advantageous  
25 to remove the pressure from said hydraulic system supplying the auxiliary coupling 8.

The adjustment measures relating to the size of the gap of the nip during use are advantageously implemented by adjusting the volume of  
30 the main cylinder 4 and thus the total length of the relief cylinder structure 1.

In a fault situation, when it is necessary to transfer the rolls in a controlled manner and rapidly further away from each other, it is typically  
35 not possible to adjust the volume of the main cylinder 4 via the main coupling 5 because of the substantially too long a period of time required by the same. In the solution according to the invention, the

auxiliary coupling 8 is arranged open in a fault situation, wherein the pressure produced in the quick-opening cylinder 6 is discharged to the hydraulic system via the auxiliary coupling, said hydraulic system being arranged in a substantially non-pressurized state in the manner described hereinabove. As a result of opening the auxiliary coupling, the pressure of the quick-opening cylinder 6 is reduced below the pressure of the main cylinder 4, wherein the auxiliary piston 7 moves towards the end of the arm 3, to a position according to Fig. 2. Because the volume of the main cylinder 4 grows in accordance with the cylindrical space formed inside the arm 3, the volume restricted by the frame 2 of the relief cylinder 1 is reduced with an equal volume. Thus, the arm 3 moves such a distance inside the frame 2 that the volume of the main cylinder 4 remains substantially the same as in the operating situation, because the force of the roll producing the pressure effect also remains substantially the same in an operating and fault situation. As a result of the mutual movement of the arm 3 and the frame 2, the length of the relief cylinder 1 is reduced, wherein the roll correspondingly moves into an open position

Because the opening movement of the relief cylinder attained in the quick opening is proportional to the volume of the quick-opening cylinder 6, it is possible to change the length of the opening movement by changing the volume of the quick-opening cylinder. In a preferred embodiment according to Fig. 3, the length of the auxiliary piston 7 is increased when compared to the embodiment of Fig. 2. Thus, the volume of the quick-opening cylinder 6 is reduced and the quick-opening movement (i.e. the movement of the frame 2 and the arm 3 with respect to each other) is reduced.

It is advantageous to implement the adjustment of the volume of the quick-opening cylinder 6 in the manner shown in Figs 2 and 3 by changing the length of the auxiliary piston 7, because the frame 2 of the relief cylinder 1 and the arm 3 are thus similar, irrespective of the volume of the quick-opening cylinder. This is especially advantageous when several different rolls are guided in a multipal calender according to the invention, because it is possible to determine individual quick-opening dimensions for the rolls on the basis of the dimensions of the

7

auxiliary pistons 7, and still similar frame parts 2 and arm parts 3 of the relief cylinder are used in each roll, wherein maintenance can be arranged very economically.

- 5 It is, of course, obvious that the invention is not limited solely to the embodiment presented in the example above, but in the quick-opening process it is for example possible to guide the pressurized medium from the quick-opening cylinder 6 also to another location than to the hydraulic system in a manner deviating from the example. In the relief  
10 cylinder structure 1 according to the invention it is also possible to use any suitable pressurized medium, such as gas or liquid.



## Claims:

1. A relief cylinder structure (1) for guiding a roll in a multinip calender, said relief cylinder structure comprising at least:
- 5       - a frame (2):
- an arm (3) that is arranged to move linearly in relation to the frame,
- a quick-opening cylinder (6) and
- a hydraulic coupling (5,8),
- 10       **characterized** in that the quick-opening cylinder (6) is placed inside the arm (3).
2. The relief cylinder structure (1) according to claim 1, **characterized** in that the relief cylinder structure (1) also comprises
- 15       at least an auxiliary piston (7) that is arranged to move linearly in the quick-opening cylinder (6), in parallel to the arm (3) and the frame (2).
3. The relief cylinder structure (1) according to claim 1, **characterized** in that the volume of the quick-opening cylinder (6) is
- 20       at its largest when the total length of the relief cylinder structure (1) is at its longest.
4. The relief cylinder structure (1) according to claim 1, **characterized** in that the volume of the quick-opening cylinder (6) is
- 25       at its smallest when the total length of the relief cylinder structure (1) is at its shortest.
5. The relief cylinder structure (1) according to claim 1, **characterized** in that the first hydraulic coupling (5) is placed
- 30       substantially at the end of the frame (2), and the second hydraulic coupling (8) is placed substantially at the end of the arm (3).
6. An arm (3) used in a relief cylinder structure (1), **characterized** in that the arm (3) comprises at least a quick-opening cylinder (6) placed therein.
- 35

7. The arm (3) according to claim 6, used in a relief cylinder structure (1), **characterized** in that the arm (3) also comprises at least
- 5       - an auxiliary piston (7) that is arranged to move in the quick-opening cylinder, and
- a hydraulic coupling (8) placed substantially at the end of the arm (3).
- 10     8. The arm according to claim 7, used in a relief cylinder structure (1), **characterized** in that the auxiliary piston (7) is arranged to move linearly in the quick-opening cylinder (6), in parallel to the arm (3) and the frame (2).

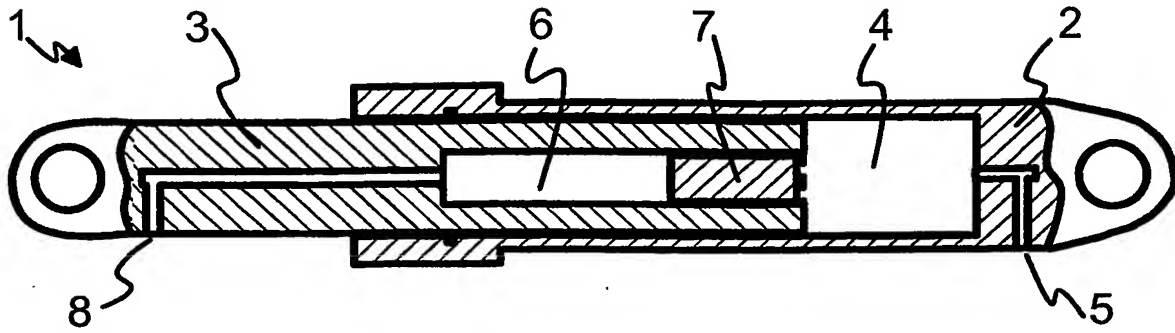


Fig. 1

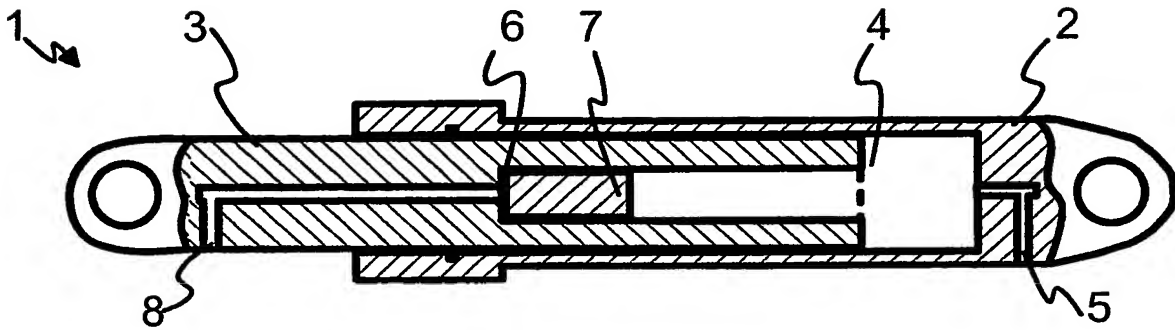


Fig. 2

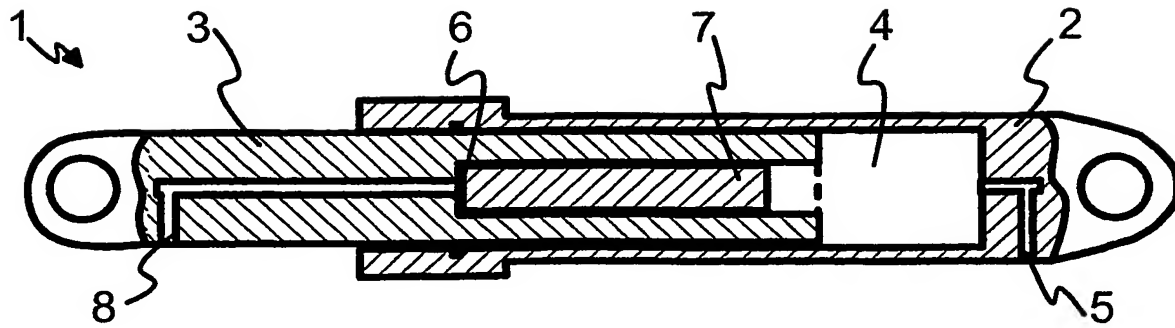


Fig. 3

## INTERNATIONAL SEARCH REPORT

International Classification No  
PCT/FI 03/00452

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 D21G1/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 D21G F15B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 97 42375 A (VALMET CORP) 13 November 1997 (1997-11-13) corresponding to EP842324 mentioned in the description page 13, line 29 -page 18, line 20; figures 3-5	1
A	--- US 5 111 735 A (JOHNSON NOEL R) 12 May 1992 (1992-05-12) the whole document	1
A	--- US 2001/018869 A1 (SCHNEID JOSEF ET AL) 6 September 2001 (2001-09-06) the whole document -----	1

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&amp;" document member of the same patent family

Date of the actual completion of the international search

29 August 2003

Date of mailing of the international search report

11.09.03

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

JAN CARLERUD/ ELY

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International

Application No

PCT/FI 03/00452

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9742375	A	13-11-1997	FI 961912 A	07-11-1997
			AT 214759 T	15-04-2002
			CA 2226119 A1	13-11-1997
			DE 69711153 D1	25-04-2002
			DE 69711153 T2	22-08-2002
			EP 0842324 A1	20-05-1998
			WO 9742375 A1	13-11-1997
			JP 11509590 T	24-08-1999
			US 5806415 A	15-09-1998
-----				
US 5111735	A	12-05-1992	BR 9107036 A	17-08-1993
			CA 2094814 A1	01-05-1992
			DE 69104218 D1	27-10-1994
			DE 69104218 T2	09-03-1995
			DE 554362 T1	25-11-1993
			EP 0554362 A1	11-08-1993
			FI 931949 A	29-04-1993
			JP 7011307 B	08-02-1995
			JP 5507544 T	28-10-1993
			KR 163207 B1	01-12-1998
			WO 9208066 A1	14-05-1992
-----				
US 2001018869	A1	06-09-2001	DE 10010772 C1	10-05-2001
			EP 1130160 A2	05-09-2001
-----				

## PATENT COOPERATION TREATY

## PCT

REC'D 05 MAR 2004

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

WIPO

PCT

(PCT Article 36 and Rule 70)

(Rationalised Report according to the Notice of the President of the EPO published in the OJ11/2001)


Applicant's or agent's file reference <b>TP102104/JMA</b>	<b>FOR FURTHER ACTION</b> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. <b>PCT/FI03/00452</b>	International filing date (day/month/year) <b>09/06/2003</b>	Priority date (day/month/year) <b>10/06/2002</b>
International Patent Classification (IPC) or national classification and IPC <b>D21G1/00</b>		
Applicant <b>METSO PAPER, INC. et al.</b>		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.
2. This REPORT consists of a total of 2 sheets, including this cover sheet.
- ☐ This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consists of a total of \_\_\_\_\_ sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☐ Certain defects in the international application
- VIII ☐ Certain observations on the international application

Date of submission of the demand <b>09/01/2004</b>	Date of completion of this report <b>25/02/2004</b>
Name and mailing address of the IPEA/  European Patent Office D-80298 Munich Tel. (+49-89) 2399-0, Tx: 523656 epmu d Fax: (+49-89) 2399-4465	Authorized officer <b>POLDERDIJK S H</b>  Tel. (+49-89) 2399 2828



**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT**

---

International application No.

PCT/FI03/00452

**I. Basis of the report**

The basis of this international preliminary examination is the application as originally filed.

**V. Reasoned statement under Rule 66.2(a)(ii) with regard to novelty, inventive step or industrial applicability**

In light of the documents cited in the international search report, it is considered that the invention as defined in the claims meets the criteria mentioned in Article 33 (1) PCT, i.e. it appears to be novel, to involve an inventive step and to be industrially applicable.

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**